




1200V Half-Bridge Silicon Carbide Power Module

GE12090CDA3


V_{DS} : 1200 V I_{DS} : 875 A

Superior performance for high power, high frequency applications needing best-in-class power density

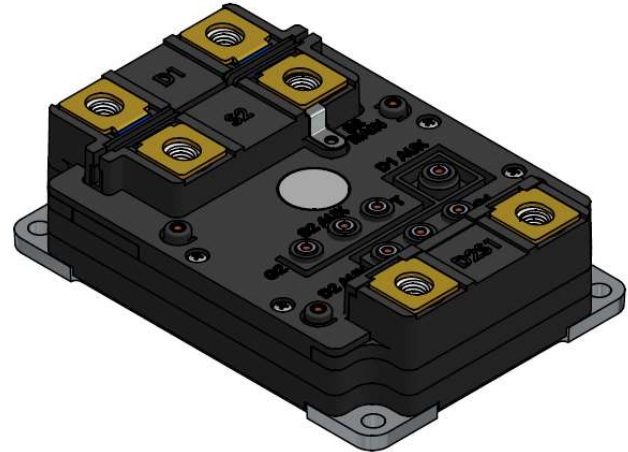

Features

- Highly reliable GE SiC MOSFET devices
- Low $R_{DS(ON)}$ (1.6 m Ω) (device only)
- Low stray inductance (10 nH)
- Ultra-low switching losses over entire operating range
- Partial discharge free at high altitudes
- GE Power Overlay wire-bondless technology
- Body diode with minimal reverse recovery
- Integrated temperature sensing
- Dedicated DESAT Pin and Source-Kelvin Pin
- AlSiC Baseplate and Si₃N₄ AMB Substrate

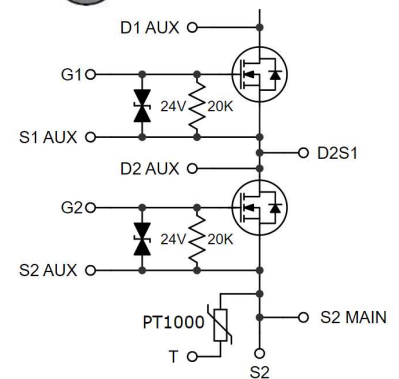

MOSFET DC Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

Symbols	Parameters	Min.	Typ.	Max.	Unit	Test Conditions	Notes
I_{DS}	Continuous Drain Current			875	A	$V_{GS} = 20\text{ V}, T_c = 25^\circ\text{C}$	Per Switch
				625	A	$V_{GS} = 20\text{ V}, T_c = 100^\circ\text{C}$	
				500	A	$V_{GS} = 20\text{ V}, T_c = 125^\circ\text{C}$	
$I_{DS,pulse}$	Pulsed Drain Current			1850	A	$T_c = 25^\circ\text{C}, t_p = 1\text{ ms}$	
V_{DSmax}	Drain - Source Breakdown Voltage	1200			V	$V_{GS} = 0\text{ V}, I_{DS} = 100\text{ }\mu\text{A}$	
V_{GSmax}	Maximum Gate - Source Voltage			-15/+23	V	$V_{DS} = 0\text{ V}$	
V_{GSop}	Recommended Gate - Source Voltage		-5/+20		V		
T_{Jmax}	Junction Temperature			175	$^\circ\text{C}$		
T_c	Case Temperature Range	-55		150	$^\circ\text{C}$		
T_{STG}	Storage Temperature Range	-55		150	$^\circ\text{C}$		
P_D	Power Dissipation			2350	W	$T_c = 25^\circ\text{C}$	



(Continued) **MOSFET DC Characteristics @ $T_J = 25^\circ\text{C}$** (unless otherwise specified)

Symbols	Parameters	Min.	Typ.	Max.	Unit	Test Conditions	Notes
I_{DS}	Continuous Drain Current			875	A	$V_{GS} = 20\text{ V}, T_c = 25^\circ\text{C}$	Per Switch
$V_{GS(th)}$	Gate Threshold Voltage	2.5	2.8	4.5	V	$V_{GS} = V_{DS}, I_{DS} = 320\text{ mA}$	
I_{DSS}	Drain Leakage Current			0.20 3.2	mA	$V_{DS} = 1200\text{ V}, V_{GS} = 0\text{ V}, T_J = 25^\circ\text{C}$ $T_J = 175^\circ\text{C}$	
I_{GSS}	Gate-Source Leakage Current			320	nA	$V_{GS} = -15/+23\text{ V}$	
$R_{DS(on)}$	On State Resistance (Device Only)		1.56 2.81	2.19 3.38	m Ω	$V_{GS} = 20\text{ V}, I_{DS} = 950\text{ A}, T_J = 25^\circ\text{C}$ $T_J = 200^\circ\text{C}$	Per Switch
$R_{G(int)}$	Gate-Source Series Resistance		0.90		Ω	$V_{GS} = 0\text{ V}, f = 100\text{ kHz}, T_c = 25^\circ\text{C}$	

MOSFET Dynamic Characteristics per switch @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

Symbols	Parameters	Min.	Typ.	Max.	Unit	Test Conditions	Notes
C_{iss}	Input Capacitance		58.6		nF	$V_{GS} = 0\text{ V}$ $V_{DS} = 600\text{ V}$ $f = 100\text{ kHz}$	
C_{oss}	Output Capacitance		3.20		nF		
C_{rss}	Reverse Transfer Capacitance		0.26		nF		
E_{on}	Turn-On Switching Energy		TBD		mJ	TBD	
E_{off}	Turn-Off Switching Energy		TBD		mJ		
t_r	Rise Time		TBD		ns		
t_f	Fall Time		TBD		ns		
Q_G	Total Gate Charge		TBD		nC		
Q_{GD}	Gate-Drain Charge		TBD		nC	TBD	
Q_{GS}	Gate-Source Charge		TBD		nC		

Body Diode Characteristics per switch @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

Symbols	Parameters	Min.	Typ.	Max.	Unit	Test Conditions	Notes
I_{SD}	Pulsed body diode current			1440	A	$V_{GS} = 0\text{ V}$	1.
V_{SD}	Diode Forward Voltage		4.69		V	$V_{GS} = 0\text{ V}, I_{SD} = 950\text{ A}, T_J = 25^\circ\text{C}$	

1. Use of body diode is recommended in pulse mode only

Thermal Characteristics

Symbols	Parameters	Min.	Typ.	Max.	Unit	Test Conditions	Notes
R_{th}	Thermal Resistance Junction-to-Case		0.060	0.064	$^\circ\text{C}/\text{W}$	JESD51-14	Per Switch



Temperature Sensor Characteristics

Symbols	Parameters	Min.	Typ.	Max.	Unit	Test Conditions	Notes
R _{RTD}	Rated Resistance of RTD		1k		ohm		2.
	Tolerance of Resistance		0.12		%		
	Accuracy		0.3		°C		
	Measuring Current	100		300	μA		
TCR	Temperature Coefficient		3850		ppm/K		
	Operating Temperature	-70		+500	°C		
	Insulation Resistance		100		MOhm	20°C	

2. RTD is mounted directly over center-most die allowing direct reading of T_J

Module packaging data

Symbols	Parameters	Min.	Typ.	Max.	Unit	Test Conditions	Notes
V _{Iso}	Case Isolation Voltage	4			kV	AC 50 Hz, 1 min, 25°C	
CTI	Comparative Tracking Index		600				
M _s	Mounting Torque			10.0	N-m	Power Terminals	
				6.0		Baseplate	
				1.0		Auxiliary	
L _{D1S2}	Loop Inductance		10		nH		
	Module Mass		0.76		Kg		
	Clearance Distance		8		mm	D1 to S2	
			68		mm	S2 to D2S1	
			33		mm	D1 to Baseplate	
			47		mm	S2 to Baseplate	
			33		mm	D2S1 to Baseplate	
	Creepage Distance		89		mm	D1 to S2	
			96		mm	S2 to D2S1	
			33		mm	D1 to Baseplate	
			55		mm	S2 to Baseplate	
			33		mm	D2S1 to Baseplate	
M _{BP}	Base Plate Material		AlSiC				



Typical performance: **GE12090CDA3**

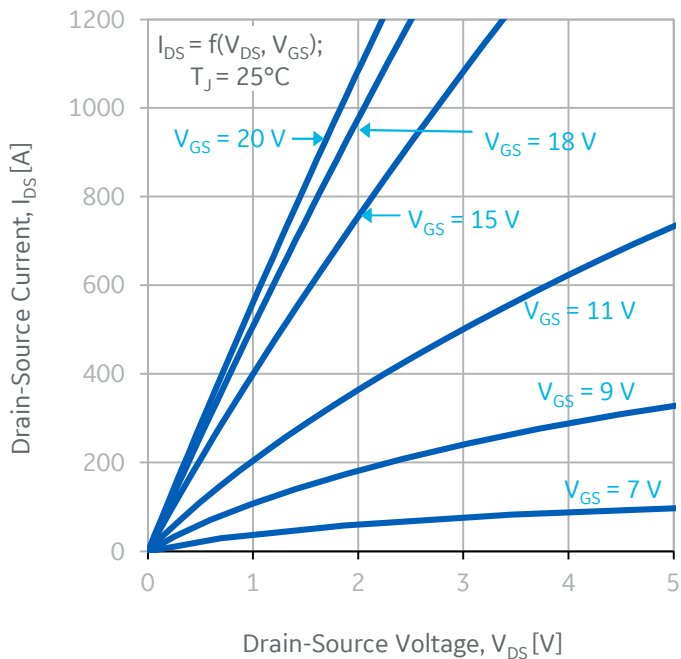


Figure 1: Output Characteristics (25°C)

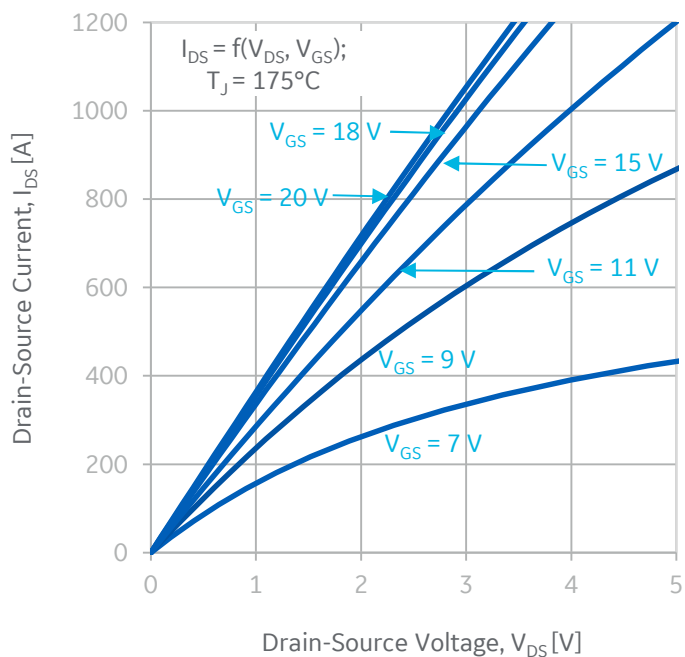


Figure 2: Output Characteristics (175°C)

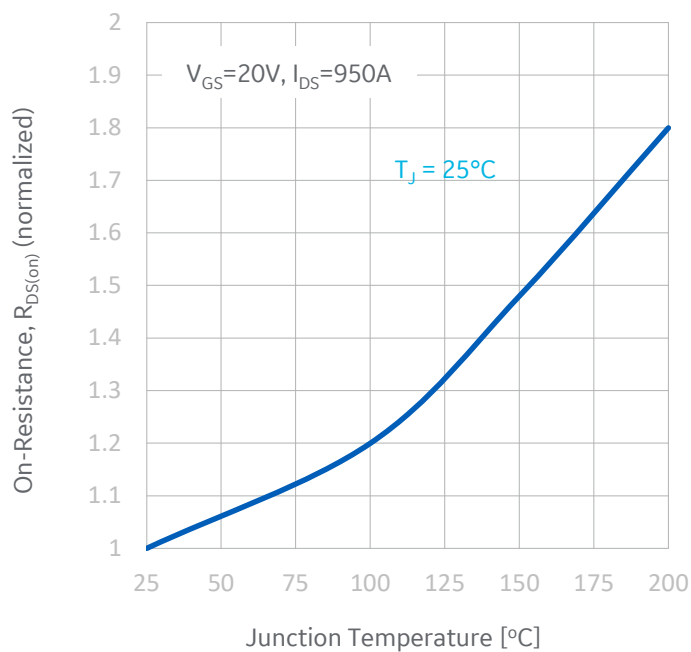


Figure 3: Normalized On-state Resistance vs. Temperature

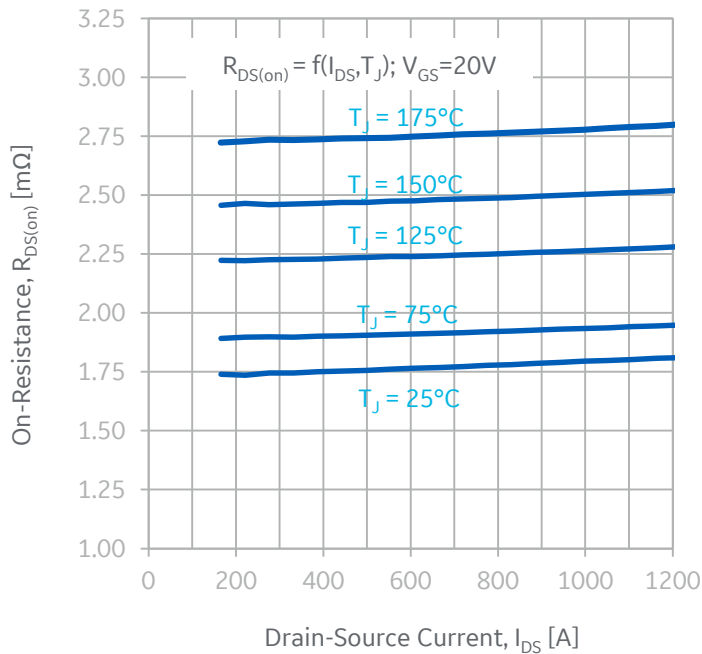


Figure 4: Module Drain-Source On-state Resistance



Typical performance: **GE12090CDA3**

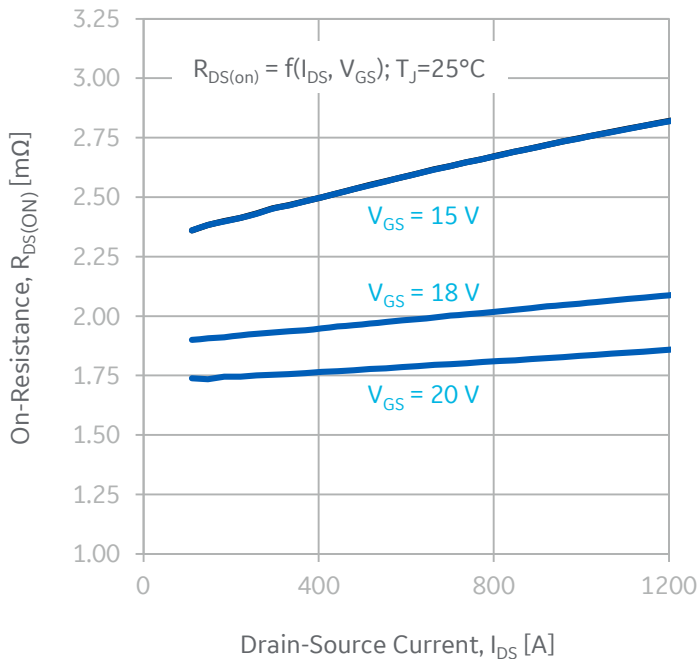


Figure 5: Module Drain-Source On-state Resistance

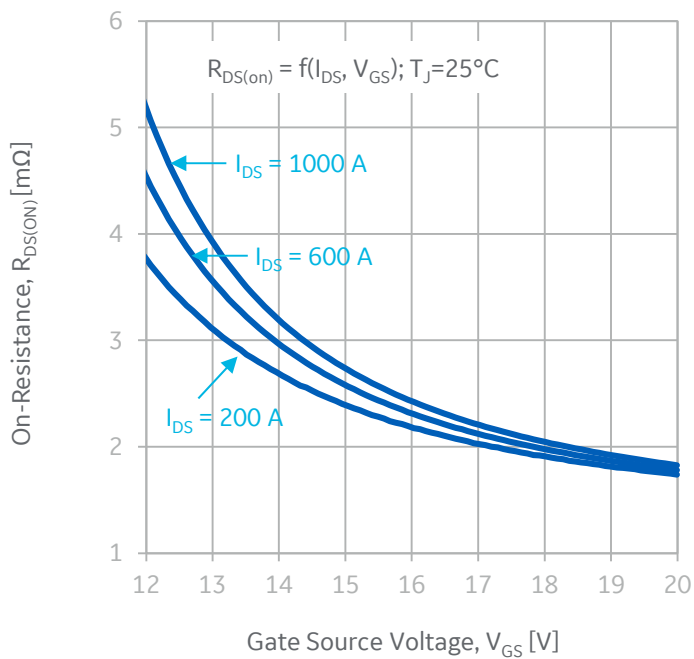


Figure 6: Drain-Source On-state Resistance vs. Gate Voltage

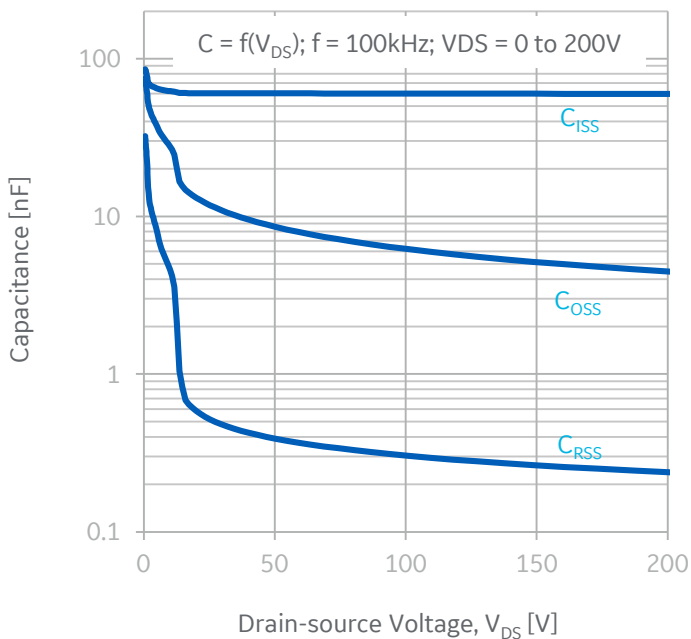


Figure 7: Junction Capacitances to 200 V

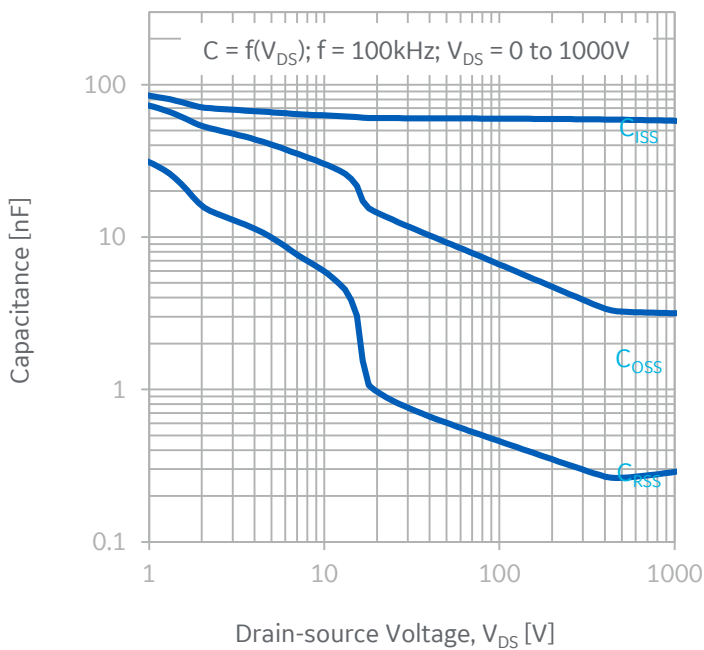


Figure 8: Junction Capacitances to 1000 V



Typical performance: **GE12090CDA3**

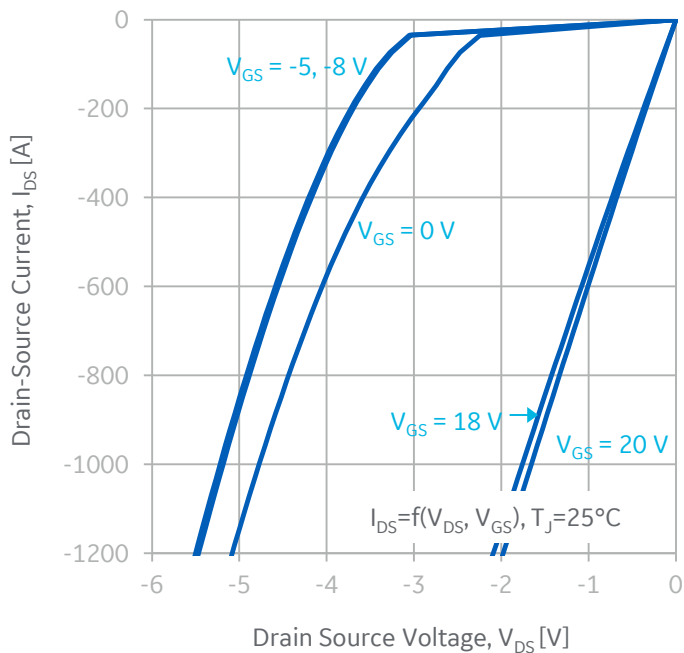


Figure 9: 3rd Quadrant Characteristics (25°C)

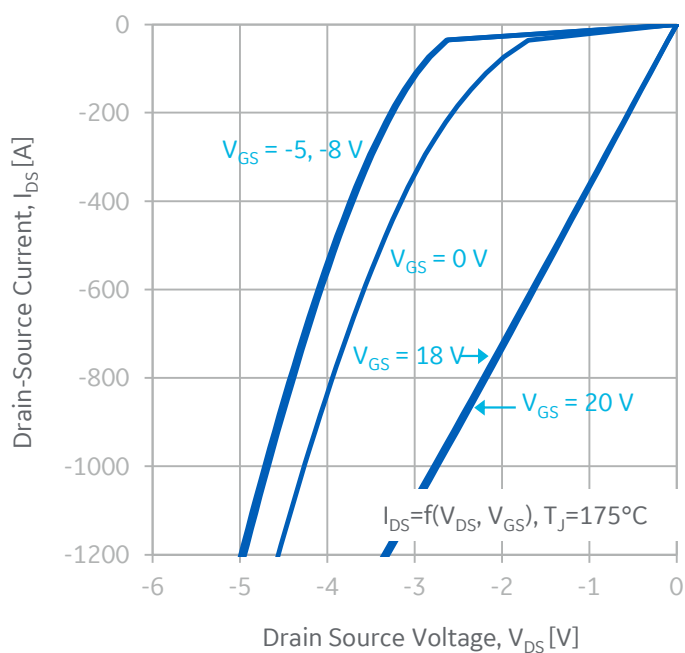


Figure 10: 3rd Quadrant Characteristics (175°C)

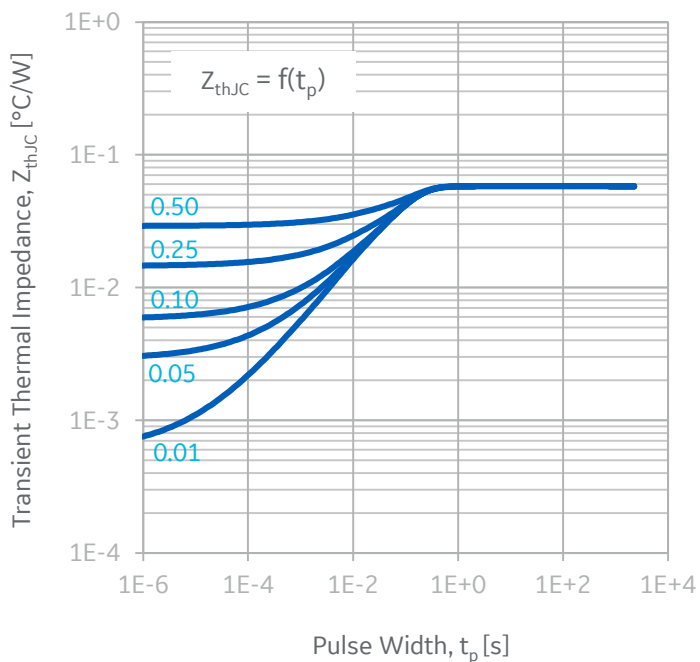


Figure 11: Transient Thermal Impedance


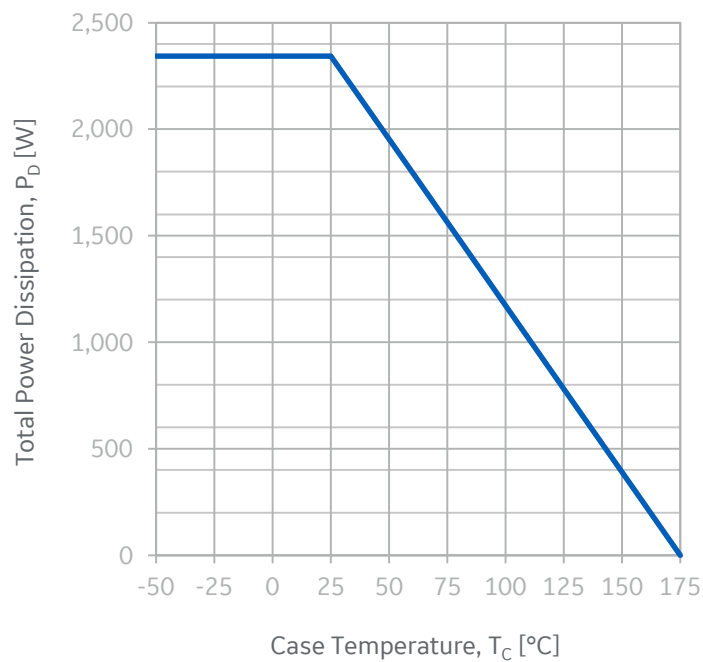


Figure 12: Maximum Power Dissipation vs. Case Temperature



Module dimensions (millimeters)

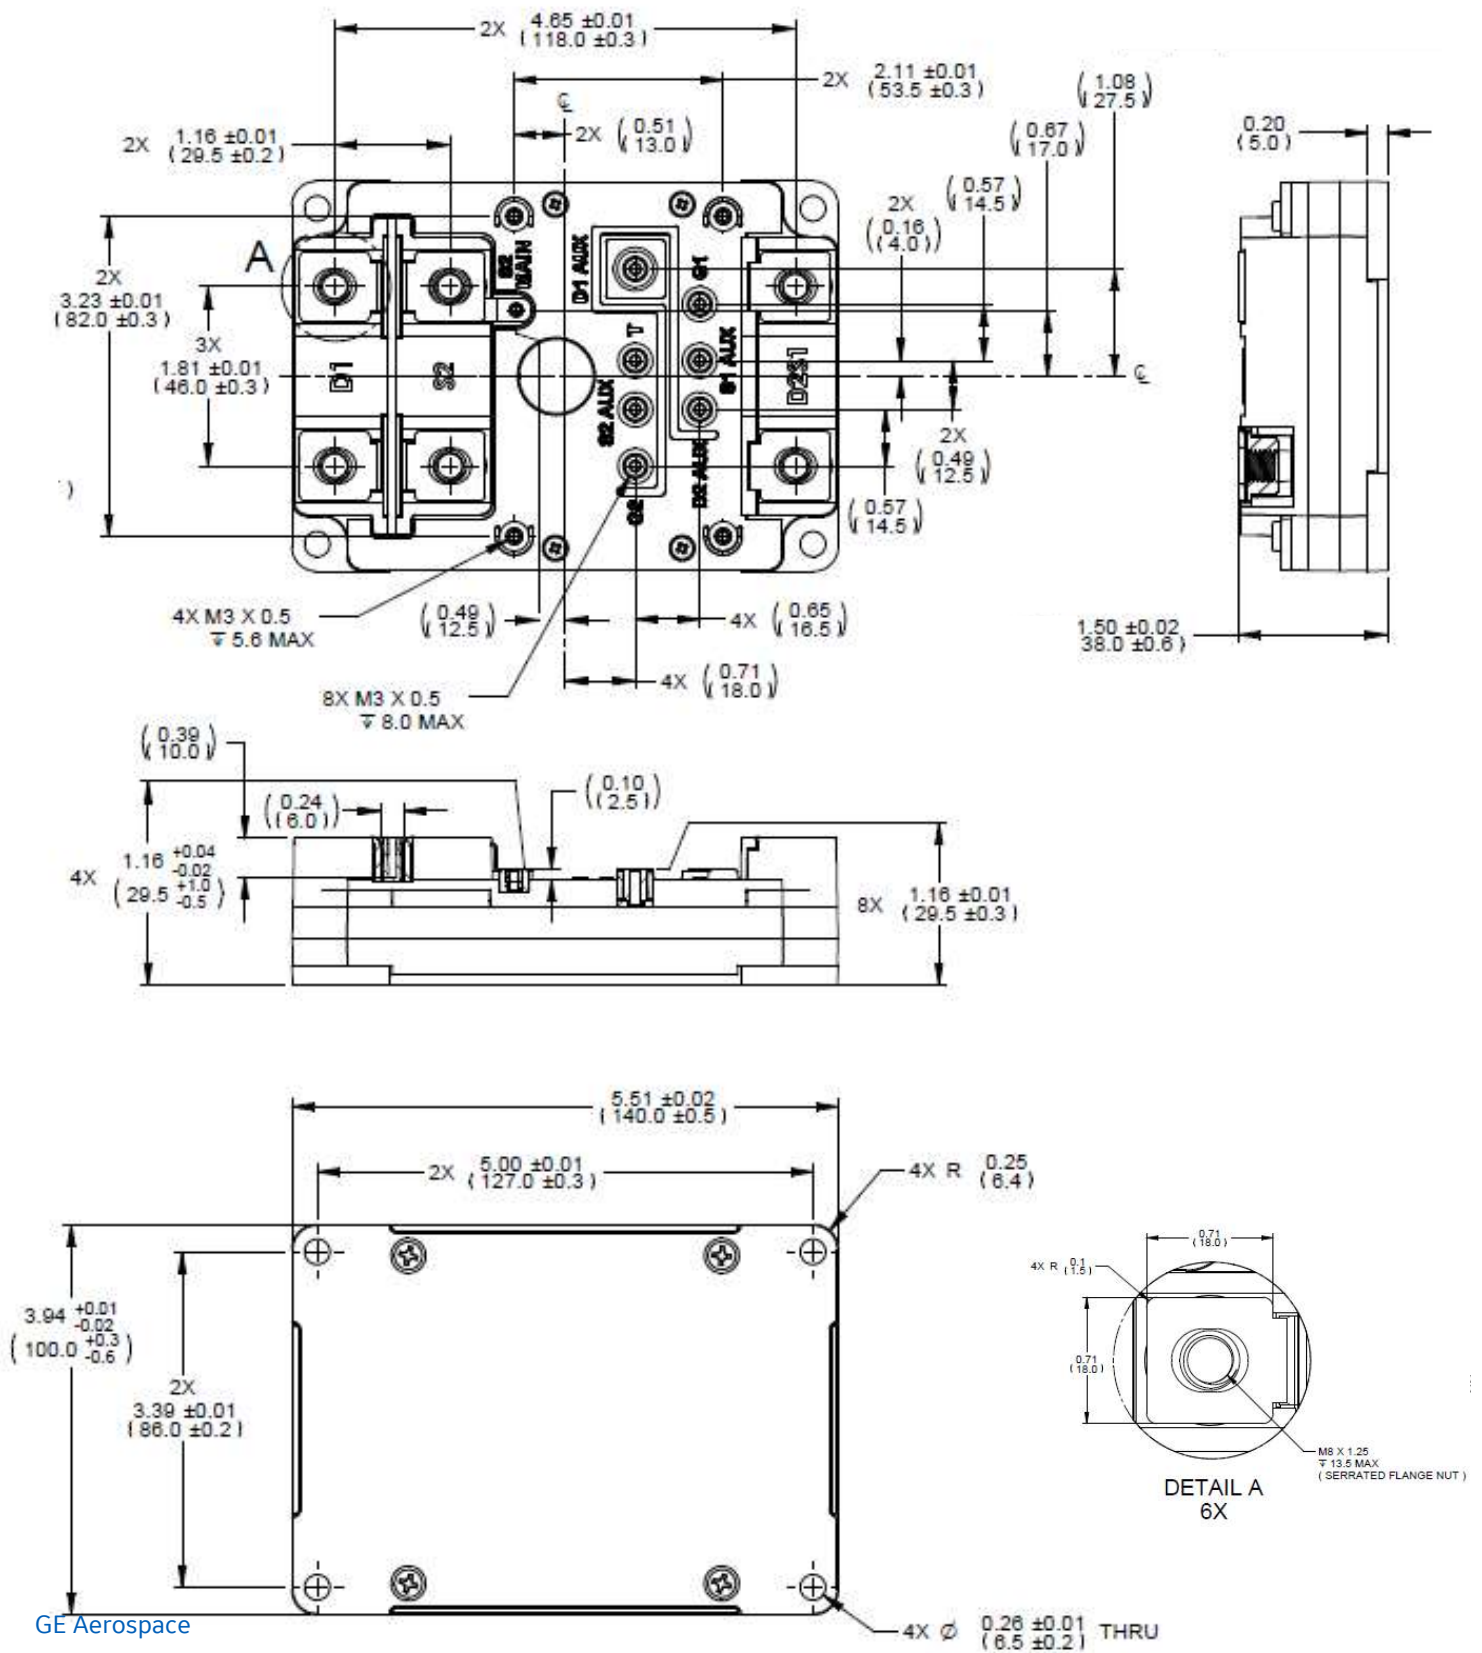

PRELIMINARY



Disclaimer

The data presented in this document are for informational purposes only and shall in no event be regarded as a guarantee of conditions or characteristics. Any warranty or license for this product shall be specified and governed by the terms of a separate purchase agreement. General Electric Company does not assume any liability arising out of the application or use of this product; neither does it convey any license under its patent rights, nor the rights of others.

General Electric Company reserves the right to make changes in specifications and features shown herein to improve reliability, function, or design, or discontinue this product, at any time without notice or obligation. Contact your GE representative for the most current information.

Warning

This product is not authorized for use (1) in life support systems or (2) for applications implanted into the human body, without the express written approval of General Electric Company.

Questions or need help designing in GE SiC Power modules? Please contact:

SiC.Products@ge.com

GE Aviation
2705 Gateway Dr.
Pompano Beach, FL 33069
(954) 984-2400

Document revisions

Rev. 1.2 - Public Release – October 2022